
Regen Switches Wiring & Testing Directions

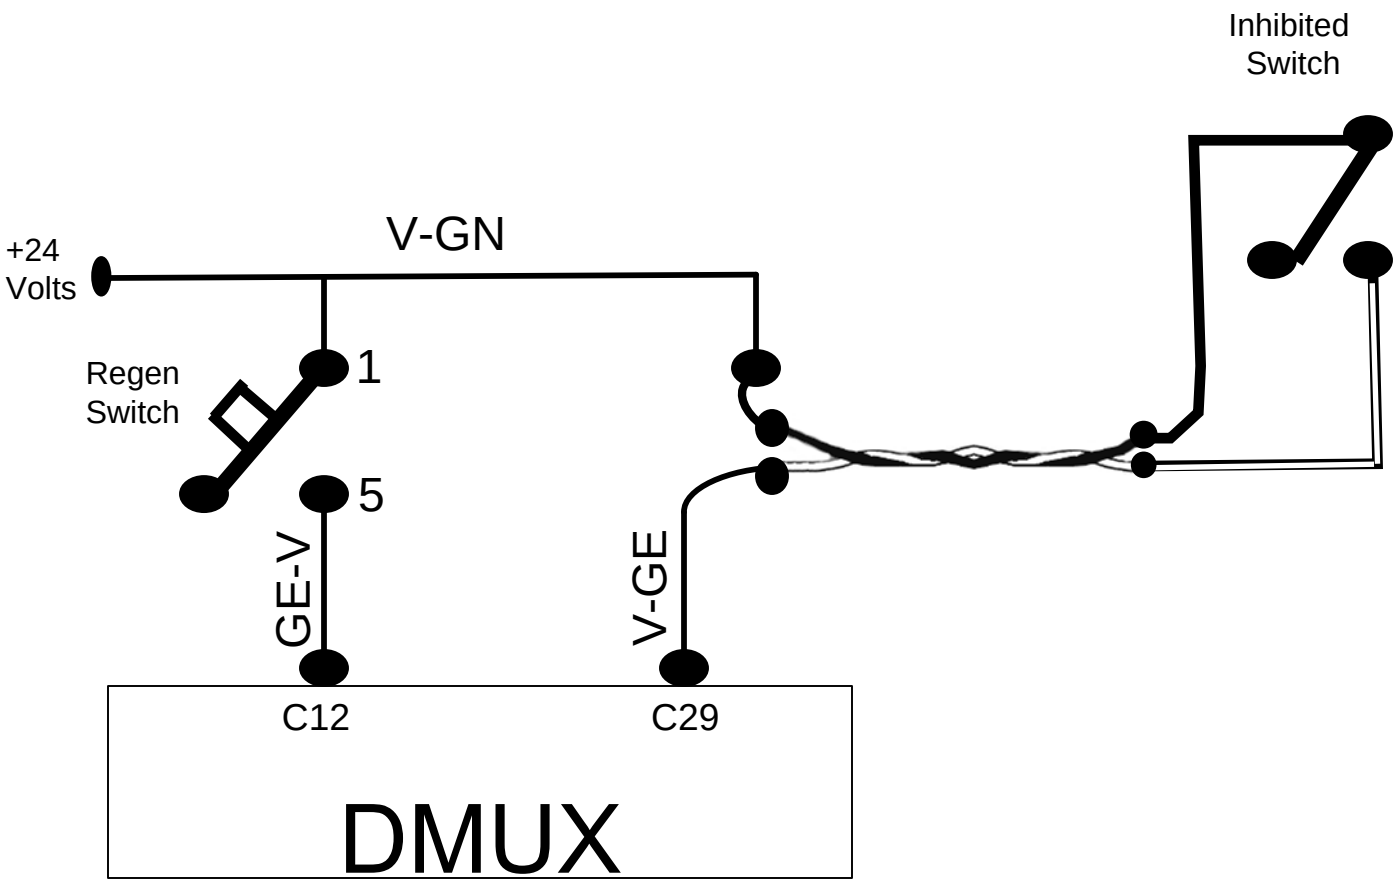

At the C12 & C29 pins on the C plug of the DMUX with switch not activated there should be approximately 12 volts and with the the switches activated there should be approximately 24 volts. Also when the Inhibited switch is activated you should see in the display that the Inhibit switch is turned on.